

UTILITY PATENT APPLICATION TRANSMITTAL

Assistant Commissioner for Patents
Washington, D.C. 20231
BOX PATENT APPLICATION

Attorney Docket No.: PA000230
Date: 4/14/00
Express Mail Label No.: EJ745135466US

Dear Sir:

Transmitted herewith for filing is the patent application of:

Inventor(s): RASHID ATTAR ET AL.

For: METHOD AND APPARATUS FOR ADAPTIVE TRANSMISSION CONTROL IN A HIGH
DATA RATE COMMUNICATIONS SYSTEM

Enclosed are:

1. ☒ Patent application (44) total pages.
2. ☒ Drawings: ☐ Formal () sheet(s) or ☒ Informal (7) sheet(s).
3. ☒ Declaration/Power of Attorney: ☐ Signed ☒ Unsigned
4. ☐ An Assignment () pages and Recordation Form Cover Sheet.
5. ☐ A Preliminary Amendment () pages.
6. ☐ Information Disclosure Statement (IDS):
 - a. ☐ PTO-1449
 - b. ☐ Copies of IDS Citations (number of citations:)
7. ☐ Other:

CLAIMS:	(a) Filed	(b) Extra Claims	Large Entity Fee	Fee Paid
Total*	64 - 20	44	x \$18 =	\$792
Independent**	7 - 3	4	x \$78 =	\$312
Multiple Dependent Claim(s): <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes			\$260	\$0
APPLICATION FILING FEE			\$690	\$690
			TOTAL FEE	\$1794

*If the number in column a is less than 20, enter 0 in column b.

**If the number in column b is less than 3, enter 0 in column b.

8. ☐ A check in the amount of \$_____ is enclosed to pay the filing fee.
9. ☒ Please charge Deposit Account No. 17-0026 of QUALCOMM Incorporated the amount of \$1794.00. The Commissioner is hereby authorized to charge payment of any additional fees which may be required, or credit any overpayment, to said Deposit Account No. 17-0026. A duplicate of this sheet is enclosed for fee processing.
10. ☒ The Commissioner is further hereby authorized to charge to said Deposit Account No. 17-0026, pursuant to 37 CFR 1.25(b), any fee whatsoever which may become properly due or payable, as set forth in 37 CFR 1.16 to 37 CFR 1.18 inclusive, for the entire pendency of this application without specific additional authorization.

Date: 4/14/00

Signature:

Byron Rafuso
Byron Rafuso, Reg. No. 45,244

QUALCOMM Incorporated
5775 Morehouse Drive
San Diego, California 92121-1714
Telephone: (858) 658-3868
Facsimile: (858) 658-2502

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Application of)
RASHID ATAR ET AL.) For: METHOD AND APPARATUS
) FOR ADAPTIVE TRANSMISSION
) CONTROL IN A HIGH DATA
Serial No. UNKNOWN) RATE COMMUNICATIONS SYSTEM
)
Filed: HERewith) Group Art Unit: UNKNOWN

CERTIFICATE OF MAILING UNDER 37 CFR § 1.10

Assistant Commissioner of Patents
BOX PATENT APPLICATIONS
Washington, D.C. 20231

Dear Sir:

"Express Mail" mailing label No. EJ745135466US
Date of Deposit April 14, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR § 1.10 on the date indicated above and is addressed to the Assistant Commissioner of Patents, BOX PATENT APPLICATIONS, Washington, D.C. 20231.

Stephanie Young

(Name)

(Signature)

QUALCOMM Incorporated
5775 Morehouse Drive
San Diego, California 92121-1714
Telephone: (858) 658-4851
Facsimile: (858) 658-2502



METHOD AND APPARATUS FOR ADAPTIVE TRANSMISSION CONTROL IN A HIGH DATA RATE COMMUNICATION SYSTEM

5 BACKGROUND OF THE INVENTION

I. Field of the Invention

The current invention relates to wireless data communication. More particularly, the present invention relates to a novel and improved method and
10 apparatus for high rate packet data transmission in a wireless communication system.

II. Description of the Related Art

15 A modern day communication system is required to support a variety of applications. One such communication system is a code division multiple access (CDMA) system which conforms to the "TIA/EIA-95 Mobile Station-Base Station Compatibility Standard for Dual-Mode Wideband Spread Spectrum Cellular System" and its progeny, hereinafter referred to as IS-95.
20 The CDMA system allows for voice and data communications between users over a terrestrial link. The use of CDMA techniques in a multiple access communication system is disclosed in U.S. Patent No. 4,901,307, entitled "SPREAD SPECTRUM MULTIPLE ACCESS COMMUNICATION SYSTEM USING SATELLITE OR TERRESTRIAL REPEATERS", and U.S. Patent No.
25 5,103,459, entitled "SYSTEM AND METHOD FOR GENERATING WAVEFORMS IN A CDMA CELLULAR TELEPHONE SYSTEM", both assigned to the assignee of the present invention and incorporated by reference herein.

In a CDMA system, communications between users are conducted
30 through one or more base stations. In wireless communication systems, forward link refers to the channel through which signals travel from a base station to a subscriber station, and reverse link refers to channel through which signals travel from a subscriber station to a base station. By transmitting data on a reverse link to a base station, a first user on one subscriber station
35 communicates with a second user on a second subscriber station. The base station receives the data from the first subscriber station and routes the data to a base station serving the second subscriber station. Depending on the location

of the subscriber stations, both may be served by a single base station or multiple base stations. In any case, the base station serving the second subscriber station sends the data on the forward link. Instead of communicating with a second subscriber station, a subscriber station may also
5 communicate with a terrestrial internet through a connection with a serving base station. In wireless communications such as those conforming to IS-95, forward link and reverse link signals are transmitted within disjoint frequency bands.

The subscriber station communicates with at least one base station
10 during a communication. CDMA subscriber stations are capable of communicating with multiple base stations simultaneously during soft handoff. Soft handoff is the process of establishing a link with a new base station before breaking the link with the previous base station. Soft handoff minimizes the probability of dropped calls. The method and system for providing a
15 communication with a subscriber station through more than one base station during the soft handoff process are disclosed in U.S. Patent No. 5,267,261, entitled "MOBILE ASSISTED SOFT HANDOFF IN A CDMA CELLULAR TELEPHONE SYSTEM," assigned to the assignee of the present invention and incorporated by reference herein. Softer handoff is the process whereby the
20 communication occurs over multiple sectors which are serviced by the same base station. The process of softer handoff is described in detail in copending U.S. Patent No. 5,625,876, entitled "METHOD AND APPARATUS FOR PERFORMING HANDOFF BETWEEN SECTORS OF A COMMON BASE STATION", assigned to the assignee of the present invention and incorporated
25 by reference herein

Given the growing demand for wireless data applications, the need for very efficient wireless data communication systems has become increasingly significant. The IS-95 standard is capable of transmitting traffic data and voice data over the forward and reverse links. A method for transmitting traffic data
30 in code channel frames of fixed size is described in detail in U.S. Patent No. 5,504,773, entitled "METHOD AND APPARATUS FOR THE FORMATTING OF DATA FOR TRANSMISSION", assigned to the assignee of the present invention and incorporated by reference herein. In accordance with the IS-95 standard, the traffic data or voice data is partitioned into code channel frames
35 that are 20 milliseconds wide with data rates as high as 14.4 Kbps.

A significant difference between voice services and data services is the fact that the former imposes stringent and fixed delay requirements. Typically,

the overall one-way delay of speech frames must be less than 100 milliseconds. In contrast, the data delay can become a variable parameter used to optimize the efficiency of the data communication system. Specifically, more efficient error correcting coding techniques which require significantly larger delays than those that can be tolerated by voice services can be utilized. An exemplary efficient coding scheme for data is disclosed in U.S. Patent No. 5,933,462, entitled "SOFT DECISION OUTPUT DECODER FOR DECODING CONVOLUTIONALLY ENCODED CODEWORDS", assigned to the assignee of the present invention and incorporated by reference herein.

Another significant difference between voice services and data services is that the former requires a fixed and common grade of service (GOS) for all users. Typically, for digital systems providing voice services, this translates into a fixed and equal transmission rate for all users and a maximum tolerable value for the error rates of the speech frames. In contrast, for data services, the GOS can be different from user to user and can be a parameter optimized to increase the overall efficiency of the data communication system. The GOS of a data communication system is typically defined as the total delay incurred in the transfer of a predetermined amount of data, hereinafter referred to as a data packet.

Yet another significant difference between voice services and data services is that the former requires a reliable communication link which, in the exemplary CDMA communication system, is provided by soft handoff. Soft handoff results in redundant transmissions from two or more base stations to improve reliability. However, this additional reliability is not required for data transmission because the data packets received in error can be retransmitted. For data services, the transmit power used to support soft handoff can be more efficiently used for transmitting additional data.

Transmission delay required to transfer a data packet and the average throughput rate are two attributes used to define the quality and effectiveness of a data communication system. Transmission delay does not have the same impact in data communication as it does for voice communication, but it is an important metric for measuring the quality of the data communication system. The average throughput rate is a measure of the efficiency of the data transmission capability of the communication system. There is a need in the art for communication systems that provide improved data throughput while simultaneously providing a GOS that is appropriate for wireless packet data services.

SUMMARY OF THE INVENTION

5 The present invention is directed to a novel and improved method and apparatus for high rate packet data transmission in a CDMA system. An exemplary system for transmitting high rate digital data in a wireless communication system is disclosed in copending U.S. Patent Application Serial No. 08/963,386, entitled "METHOD AND APPARATUS FOR HIGHER RATE
10 PACKET DATA TRANSMISSION," (hereafter the '386 application) assigned to the assignee of the present application and incorporated by reference herein. The present invention advantageously improves the throughput of a high data rate CDMA system by minimizing unnecessary retransmissions of packet data within transmit time slots after successful decoding of the associated packet
15 data by a destination network node such as a wireless subscriber station.

 It is an aspect of the present invention to improve the data throughput of a high data rate system such as that described in the '386 application. In an exemplary aspect, a destination network node such as a subscriber station sends a data rate control (DRC) signal to a source network node such as a base station
20 on a data rate control (DRC) channel. Based on the DRC signal, the base station chooses a data rate at which packets of data are sent to the subscriber station on the forward link. The information in the DRC signal is based on carrier-to-interference (C/I) measurements that the subscriber station performs on previous forward link signals received from the base station. In an exemplary
25 aspect, the subscriber station chooses a data rate that will ensure that the packet error rate (PER) will not exceed a predetermined target PER and specifies that data rate in the DRC signal. As the characteristics of the forward link channel change over time, the subscriber station adjusts the DRC signal accordingly.

 In an exemplary aspect of the invention, the base station sends data to
30 the subscriber station at the data rate specified by the DRC signal most recently received from the subscriber station. The base station sends packets of data to a plurality of subscriber stations using fixed-duration forward link time slots. In an exemplary aspect, the base station sends data to only one of the plurality of subscriber stations during each forward link time slot.

35 If the data rate specified by the DRC signal of a destination subscriber station is sufficiently small, the base station sends each packet of data within multiple forward link time slots. In an exemplary aspect, a 1024-bit packet of

data may be transmitted at a rate of 38,400 bits-per-second (bps) within sixteen time slots, with each time slot having a duration of 1.67 milliseconds. In the exemplary aspect, the same packet of data may be alternatively sent at a rate of 76,800 bps within eight time slots. Accordingly, several other data rates are contemplated in the exemplary aspect, with a predetermined number of time slots associated with each data.

In an aspect of the invention, the forward link signal transmitted in each of the multiple time slots for a packet contains all of the data in the packet. In other words, the packet data is not divided among the multiple time slots.

10 Instead, the entire packet of data is transmitted within each time slot. The lower the data rate indicated by the subscriber station's DRC request, the greater the number of time slots in which the packet must be repeated to maintain the target PER. For example, a DRC request of a data rate of 38,400 may require that the base station send a 1024-bit packet in sixteen time slots.

15 The base station will then transmit the same 1024-bit packet during sixteen subsequent time slots. In an exemplary aspect, the base station uses puncturing techniques well known in the art to puncture a preamble into the signal transmitted during the first of multiple time slots associated with a multiple-slot packet. The subscriber station uses this preamble to determine whether the base station has begun transmitting a multiple-slot packet addressed to the subscriber station.

20

In an aspect of the invention, the multiple copies of a multiple-slot packet are sent within non-consecutive time slots. For example, a sixteen-slot packet may be sent in every other slot during a thirty-one-slot period. In another aspect of the invention, a sixteen-slot packet may be sent in every fifth slot of a sixty-five-slot period. In either aspect, the pattern of slots used to transmit frames of each rate is predetermined. All signals sent within the time slots associated with a single packet are transmitted at the same data rate. In other words, once the transmission of a multiple-slot packet has begun at a data

25 rate, the rest of the time slots associated with that packet are transmitted at the same data rate. The subscriber station accumulates the data received during each of the associated time slots in order to successfully decode the packet data and distinguish it from the signal noise.

30

In an exemplary aspect, the base station may not increase the data rate of a multiple-slot packet once the first time slot of the packet has been transmitted. To avoid losing a multiple-slot packet when the forward link channel degrades, the data rates chosen for multiple-slot packets are very conservative. Often, if

35

the forward link channel improves during the transmission of a multiple-slot packet, the destination subscriber station may successfully decode the packet before all of the multiple copies of the packet have been sent by the base station. The longer the period during which multiple-slot packets are transmitted, the greater is the probability that the C/I of the forward link will change and no longer match the subscriber station's requested DRC data rate. If the subscriber station successfully decodes the packet within less than the predetermined number of copies of the packet, transmitting the remaining copies of the packet is a waste of precious forward link bandwidth. In addition, if the forward link signal happens to fade during the transmission of a multiple-slot packet, then the data thus far accumulated for the packet might be prematurely discarded. Transmitting the packet for just one or two more slots might enable successful decoding and avoid wasting the signals transmitted in the previous time slots.

In an exemplary aspect, each packet has a sequence number, and packets that are not successfully received by a subscriber station are retransmitted by a higher protocol layer. However, the subscriber station discards the buffered samples from the first transmission of the packet before the first slot of the packet retransmission is received. For this reason, the subscriber station cannot combine the packet retransmissions by the higher protocol layer with samples buffered from the first attempt to transmit the packet. For example, suppose a multiple-slot packet is transmitted at a low rate in sixteen time slots. If the packet is not successfully decoded in those sixteen time slots, then the higher protocol layer retransmits the packet at some time in the future. If the retransmission occurs at the same data rate as the first attempt, then the retransmission may consume sixteen additional time slots, depending upon the data rate used for the retransmission. If, however, the subscriber station can request a few more time slots in the first attempt, then the packet might be successfully decoded within, for example, eighteen time slots. The net savings on the forward link would be fourteen time slots.

In an aspect of the invention, each forward link data rate is assigned a default number of time slots per packet. If the subscriber station successfully decodes a multiple-slot packet early (before it has received the default number of time slots), the subscriber station stops the base station from sending the rest of the time slots for the packet. The subscriber station accomplishes this by sending a Stop-Repeat signal to the base station. Upon receiving a Stop-Repeat signal, the base station ceases sending the packet in subsequent time slots.

In another aspect of the invention, if the subscriber station is unable to decode a multiple-slot packet from signals received in the default number of time slots, the subscriber station requests additional retransmissions of the packet from the base station. The subscriber station accomplishes this by sending a Continue-Repeat signal to the base station. Upon receiving a Continue-Repeat signal, the base station sends additional copies of the packet in one or more subsequent time slots in addition to the default number of time slots.

BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

FIG. 1 is a diagram of an exemplary wireless communication system.

FIG. 2 is a diagram of an exemplary forward link signal structure.

FIGS. 3a and 3b are diagrams of exemplary sequences of forward link time slot transmissions.

FIGS. 4a and 4b are a flowchart showing an exemplary method of receiving a multiple-slot packet.

FIG. 5 is a flowchart showing an exemplary method of transmitting a multiple-slot packet.

FIG. 6 is a diagram of an exemplary subscriber station apparatus.

FIG. 7 is a diagram of an exemplary base station apparatus.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

FIG. 1 shows a first wireless base station **106a** transmitting to subscriber stations within a coverage area **108a** and a second wireless base station **106b** transmitting to subscriber stations within a coverage area **108b** that overlaps with coverage area **108a**. Subscriber station **102a** is located within coverage area **108a** but not coverage area **108b**. Subscriber station **102b** is located within both coverage area **108a** and coverage area **108b**. Base station **108a** transmits data to subscriber station **102a** through communication channel **104a** and to subscriber station **102b** through communication channel **104b**. Base station **108b** transmits data to subscriber station **102b** through communication channel **104c**.

In an exemplary embodiment, each subscriber station **102** generates a signal quality metric based on signals received from base stations **106**. A

subscriber station **102b** receiving forward link signals from multiple base stations **106** identifies the base station associated with the received signal having the highest quality metric (for example base station **106b**). The subscriber station **102b** generates a prediction of a data rate at which the packet error rate (PER) of packets received from the selected base station **106b** will not exceed a target PER. An exemplary embodiment uses a target PER of approximately 2%.

In an exemplary embodiment, the subscriber station **102b** computes a rate at which the “tail probability” is greater than or equal to the target PER.

10 The tail probability is the probability that the actual signal quality during the packet transmission period is less than the signal quality required for successful decoding of a packet correctly at a requested rate. Subscriber station **102b** then sends a data rate control (DRC) signal based on the predicted tail probabilities to the selected base station **106b**. In an exemplary embodiment, the tail

15 probability is computed using signal quality attributes such as the carrier-to-interference (C/I) ratio of previous received signals. Based on previous measurements of signal quality, the subscriber station generates a prediction of the probably signal quality during the time slots used to transmit the next packet.

20 In an exemplary embodiment, each DRC signal sent by a subscriber station **102b** is addressed specifically to one selected base station **106b**. The selected base station **106b** is then the only base station which may transmit traffic channel data to the subscriber station **102b** during a subsequent time slot associated with the DRC signal. In an exemplary embodiment, the DRC signal

25 indicates a requested data rate at which a specific selected base station may transmit forward link data to the subscriber station **102b** during a specific future time slot. Because the selected base station **106b** is the only base station that may “serve” the subscriber station **102b** during the specific future time slot, the selected base station is referred to as a “serving base station.” In an

30 exemplary embodiment, the subscriber station **102b** identifies the serving base station **106b** by encoding the DRC signal using a specific Walsh code associated with the selected base station **106b**. Because the subscriber station **102b** uses a different orthogonal Walsh code to encode DRC signals to each different base station, no base station can decode a DRC signal that is meant for a different

35 base station.

In an alternate embodiment, the DRC signal specifies one of a predetermined set of data rates at which the base station **106b** may send forward link data to the subscriber station **102b**. The data rate specified in the DRC signal is selected from the predetermined set of data rates based on

previous measurements of signal quality metrics. The data rate is selected such that the predicted TAIL PROBABILITY for a packet at that rate will be less than or equal to the target TAIL PROBABILITY. In an exemplary embodiment, the DRC signal specifies one of thirteen possible data rates, though the number of possible data rates may vary. The DRC signal encodes the selected data rate into a four-bit signal transmitted on a DRC channel. In an exemplary embodiment, the DRC channel is orthogonal to the reverse link data channel. The reverse link data and pilot channels are orthogonally spread by 4-ary Walsh functions W_2^4 and W_0^4 , respectively, as defined in Table 1 below:

Table 1. 4-ary Walsh Functions

W_0^4	0000
W_1^4	0101
W_2^4	0011
W_3^4	0110

In an exemplary embodiment, base station **106b** monitors DRC signals from one or more subscriber stations and transmits forward link data to no more than one destination subscriber station during each forward link transmit time slot. Base station **106b** selects the destination subscriber station (for example subscriber station **102b**) based on a scheduling procedure designed to balance the quality of service (QOS) requirements of each subscriber station with the desire to maximize throughput of the system. In an exemplary embodiment, base station **106b** transmits data to the destination subscriber station **102b** only at the rate indicated by the most recent DRC signal received from the destination subscriber station. This restriction makes it unnecessary for the destination subscriber station **102b** to perform rate detection on the forward link signal. Subscriber station **102b** need only determine whether it is the intended destination subscriber station during a given time slot.

In an alternative embodiment, base station **106b** may transmit forward link packets at a different rate than indicated by the DRC signal received from the destination subscriber station **102b**. In an exemplary embodiment, base station **106b** sends a data rate signal on the forward link that is used by subscriber stations to decode the corresponding forward link packets. In an alternative embodiment, base station **106b** just sends the forward link packet, requiring the destination subscriber station **102b** to perform blind rate determination while decoding the packet.

In an exemplary embodiment, the base station transmits a preamble within the first time slot of each new forward link packet. The preamble

identifies the intended destination subscriber station. In an exemplary embodiment, the base station assigns one of a set of 32 possible Walsh codes to each active subscriber station in its cell. The Walsh codes assigned to each active subscriber station are unique within the cell. In other words, no two subscriber stations are assigned the same Walsh code for the same cell at the same time. The preamble of each packet is covered with the Walsh code assigned to the destination subscriber station. This Walsh cover identifies the intended destination subscriber station for each packet. In an exemplary embodiment, only the first of multiple slots containing data for a single packet is transmitted with a preamble. In an exemplary embodiment, the preamble is punctured into the forward link packet data.

In an exemplary embodiment, once a destination subscriber station establishes that it is the intended destination for data in a slot, the subscriber station begins decoding the data in the associated time slot. In an exemplary embodiment, the destination subscriber station **102b** determines the data rate of the data in the forward link time slot based on previous DRC signals sent by the destination subscriber station **102b**. As described above, the destination subscriber station **102b** may alternatively determine the rate based on a forward link data rate signal or on blind rate detection.

In an exemplary embodiment, base station **106b** transmits the data for a single packet using a single data rate. In other words, if a packet is transmitted within sixteen time slots, the forward link data rates in each of those time slots will be equal to each other.

In an exemplary embodiment, the number of forward link time slots used to transmit a packet varies based on the data rate at which the packet is sent. Packets sent at a lower rate are sent using a greater number of time slots. An exemplary set of data rates and associated numbers of forward link time slots is listed in Table 2.

Table 2. Forward Data Channel Modulation Parameters

Data rate (kbps)	Bits/Package	Slots/Package
38.4	1024	16
76.8	1024	8
102.4	1024	6
153.6	1024	4
204.8	1024	3
307.2	1024	2
614.4	1024	1
921.6	3072	2

1228.8	2048	1
1843.2	3072	1
2457.6	4096	1

In an exemplary embodiment, the destination subscriber station **102b** decodes a preamble transmitted within the first slot of a multiple-slot packet to identify the beginning of a new packet transmission from base station **106b**. The data rate associated with the transmission of the new packet determines the maximum number of slots that will be used to carry the packet. In an exemplary embodiment, the subscriber station knows a priori which slots received after the preamble carry data associated with the same multiple-slot packet.

The signal received in a single slot by destination subscriber station **102b** contains components of noise and interference as well as the data signal transmitted by base station **106b**. By accumulating samples for a packet over multiple slots, destination subscriber station **102b** takes advantage of the strong slot-to-slot correlation in the data signal compared to the weak slot-to-slot correlation in the interference and noise components. The samples accumulated over multiple slots eventually enable successful decoding of the packet. A multiple-slot packet is sent over a maximum number of time slots at a constant data rate. If the noise characteristics of the forward link channel improve after the first slot is sent, the destination subscriber station **102b** may be able to successfully decode the packet before receiving the maximum number of time slots. Once the destination subscriber station **102b** successfully decodes the packet, subsequent forward link time slots containing data for the decoded packet are discarded. In an exemplary embodiment, each packet includes a cyclic redundancy checksum (CRC) that enables the destination subscriber station to determine when the packet has been successfully decoded.

Another advantage of transmitting a packet over multiple time slots is that the received signal will have greater time diversity. In a dynamic fading environment, a packet that is transmitted over a short period of time can easily be lost to a relatively transient fade in the signal. However, if a packet is transmitted over a period of time that is longer than the duration of a fade, then the signal received outside of the fade period can allow successful decoding of the packet. The longer the transmission period of a packet, the lower are the chances that a fade will block the entire packet signal. However, longer transmission periods also make it more difficult to accurately predict the signal quality over the entire transmission period. In an exemplary embodiment,

feedback signals enable the system to take advantage of time diversity while suffering minimally for inaccurate predictions of tail probability.

In an exemplary embodiment, destination subscriber station **102b** accumulates samples of a packet transmitted within the multiple time slots of a multiple-slot packet. After the samples of the first slot of the packet are received, the samples of subsequent slots containing data for the same packet are accumulated into a packet accumulation buffer. If the CRC of the contents of the packet accumulation buffer indicate receipt of an error-free packet, the destination subscriber station **102b** declares the packet successfully decoded. In an exemplary embodiment, destination subscriber station **102b** then sends a Stop-Repeat signal to base station **106b**, indicating the successful decoding of the packet. Upon receiving the Stop-Repeat signal from destination subscriber station **102b**, base station **106b** terminates the transmission of that forward link packet. If fewer than the maximum number of time slots have been used to transmit the packet, the Stop-Repeat signal results in base station **106b** using fewer than the maximum number of time slots to send the packet. For example, if base station **106b** receives a Stop-Repeat signal after sending only eight slots of a sixteen-slot packet, then base station **106b** sends no more slots containing data for that packet.

It is desirable to avoid sending the Stop-Repeat signal where it results in no change in the behavior of base station **106b**. For this reason, in an exemplary embodiment, destination subscriber station **102b** only sends the Stop-Repeat signal if it has received fewer than the maximum number of time slots containing data for a multiple-slot packet.

FIG. 2 shows the forward link signal structure transmitted by each base station in an exemplary high data rate system. Forward link signals are divided into fixed-duration time slots. In an exemplary embodiment, each time slot is 1.67 milliseconds long. Each slot **202** is divided into two half-slots **204**, with a pilot burst **208** transmitted within each half-slot **204**. In an exemplary embodiment, each slot is 2048 chips long, corresponding to a 1.67 millisecond slot duration. In an exemplary embodiment, each pilot burst **208** is 96 chips long, and is centered at the mid-point of its associated half-slot **204**. A reverse link power control (RPC) signal **206** is transmitted to either side of the pilot burst in every second half-slot **204b**. In an exemplary embodiment, the RPC signal is transmitted in the 64 chips immediately before and the 64 chips immediately after the second pilot burst **208b** of each slot **202**, and is used to regulate the power of the reverse link signals transmitted by each subscriber station. In an exemplary embodiment, forward link traffic channel data are sent

in the remaining portions of the first half-slot **210** and the remaining portions of the second half-slot **212**.

In an exemplary embodiment, the pilot burst signals are transmitted continuously over an orthogonal code channel, similar to IS-95 systems. In an exemplary embodiment, the pilot burst signals are spread using a Walsh code W_0 (which is equivalent to no Walsh cover). In an exemplary embodiment, the pilot burst signals are used by subscriber stations for initial acquisition, phase recovery, timing recovery, and ratio combining. In an exemplary embodiment, the pilot burst signals are also used by subscriber stations to perform C/I measurements.

FIG. 3a is a diagram showing an exemplary arrangement of forward link slot transmissions. In an exemplary embodiment, a base station transmits a first slot of data **302a** of a multiple-slot packet to a subscriber station. The samples associated with the first slot of data **302a** are accumulated into a packet accumulation buffer in the subscriber station. After receiving the first slot of data for a packet, the subscriber station decodes a preamble from the first slot to identify the packet as addressed to the subscriber station. If the preamble is not successfully decoded, then the subscriber station searches for a preamble in the next time slot **308**.

Upon determining that the first time slot **302a** contains data for a packet addressed to the subscriber station, the subscriber station attempts to decode the received packet data from the data stored in the packet accumulation buffer. In an exemplary embodiment, the data rate of the packet is based on a DRC signal sent previously by the subscriber station and addressed specifically to the serving base station.

In an exemplary embodiment, each attempt to decode a packet from the contents of the packet accumulation buffer takes an additional number of slot periods shown as decoding period **312a**. Though shown as three slots, decoding period **312a** may vary. At the end of the decoding period **312a**, the subscriber station checks the cyclic redundancy checksum (CRC) of the received forward link packet. If the CRC indicates that the packet was received without errors, then the destination subscriber station sends a Stop-Repeat signal to the serving base station during the next time slot **304**. The base station, upon successfully decoding the Stop-Repeat signal, sends no further repeated transmissions of the same packet.

In an exemplary embodiment, a subscriber station can receive multiple packets in interlaced slots. For example, slot **302a** might contain the first slot of a first multiple-slot packet for the subscriber station. In addition, during decoding period **312a** and the next time slot **304**, the subscriber station may

receive the data for additional packets. For example, during the three slots shown as decoding period **312a**, the subscriber station might receive the third slot of data for a second multiple-slot packet, the sixteenth slot of data for a second multiple-slot packet, and the first and only slot of data for a third packet. In addition, the subscriber station might receive a slot of data for a fourth packet during the following slot **304**. The subscriber station stores the data for each separate packet into separate packet accumulation buffers. In an exemplary embodiment, wherein each multiple-slot packet is transmitted in forward link slots spaced five slots apart, a subscriber station has five packet accumulation buffers to decode as many as five packets at a time. In an exemplary embodiment, the five packets are not necessarily transmitted by the same serving base station. For example, a first serving base station may be sending the first two multiple-slot packets using time slots that are interlaced with time slots associated with three multiple-slot packets transmitted by a second serving base station.

After each slot prior to the maximum number of slots for a multiple-slot packet, the subscriber station attempts to decode the packet from the data accumulated in the corresponding packet accumulation buffer. In an exemplary embodiment, the process of decoding the contents of the packet accumulation buffer takes several slot periods shown as decoding period **312a**. If, at the end of decoding period **312a**, the packet has been successfully decoded, the subscriber station sends a Stop-Repeat signal to the serving base station. The Stop-Repeat signal is transmitted during the time slot **304** immediately following the decoding period **312a**. After sending a Stop-Repeat signal, the subscriber station searches for a subsequent packet beginning in time slot **302b**.

If the packet is not successfully decoded from the received signal of the first time slot **302a**, then the serving base station transmits the data of the packet in a second time slot **302b**. If the serving base station never receives a Stop-Repeat signal, the serving base station will continue to transmit the packet in every fifth time slot. The serving base station stops transmitting the packet after the maximum number of time slots associated with the transmit data rate has been reached. Meanwhile, the destination subscriber station accumulates data received during the different time slots of a multiple-slot packet into a packet accumulation buffer. For example, after the first data of a packet is received in a first time slot **302a** the data is accumulated into a previously clear packet accumulation buffer. When the next set of data for the same packet is received during time slot **302b**, the received data is accumulated into the same packet accumulation buffer along with the data from the first slot **302a**. The

data for the same packet is transmitted again in time slot **302c**, and the data is again accumulated into the packet accumulation buffer along with the data from previous time slots **302a** and **302b**.

After each time slot associated with the multiple-slot packet **302**, the subscriber station attempts to decode the packet from the contents of the packet accumulation buffer. If the subscriber station successfully decodes the packet after a decoding period **312**, the subscriber station sends a Stop-Repeat signal during the time slot immediately following the decoding period **312** in which the packet was decoded. In an exemplary embodiment, an exception to this rule exists when the packet is decoded after receiving the maximum number of time slots for the packet. The Stop-Repeat signal is not sent after the maximum number of time slots for a packet have been received, whether or not the packet was successfully decoded.

In an exemplary embodiment, a base station transmits at low data rates using multiple-slot packets. In order for the base station to direct the full forward link capacity to a subscriber station using a low data rate, the base station must send five multiple-slot packets at a time. In an alternate embodiment, the subscriber station has fewer packet accumulation buffers than the number of slots in decoding period **312a** and the following slot **304**. This decreases the number of simultaneous packets that the subscriber station can receive, but saves memory in the subscriber station.

If the base station does not receive a Stop-Repeat signal in time slot **304**, then the base station transmits the packet in the time slot **302b** immediately following time slot **304**. The base station's failure to decode a Stop-Repeat signal could mean either that the subscriber station did not send a Stop-Repeat signal or that the Stop-Repeat signal was lost to communication error. In the latter case, the base station may end up transmitting the packet in more time slots than needed for successful decoding by the subscriber station. For example, if the base station sends a sixteen-slot packet that is successfully decoded by the subscriber station after the first slot, the destination subscriber station will send a Stop-Repeat signal to the base station. If the base station does not successfully decode the Stop-Repeat signal, then the base station will send the remaining fifteen slots of the packet, resulting in undesirable waste of forward link bandwidth.

Several approaches are contemplated to minimize the probability that a Stop-Repeat signal is lost to communication error. In an exemplary embodiment, a subscriber station transmits the Stop-Repeat signal using the Walsh code channel otherwise used to transmit the DRC signal. In an exemplary embodiment, eleven data rates are encoded into a four-bit signal on

the DRC channel. The number of data rates is less than the sixteen possible four-bit DRC code words, leaving some code words available for other uses. In an exemplary embodiment, the Stop-Repeat signal is sent as one of the unused DRC code words. In an exemplary embodiment, the Stop-Repeat signal is transmitted through the Pilot/DRC channel using greater power than Pilot and DRC signals to improve decoding reliability of the Stop-Repeat signal.

In an alternate embodiment, the pilot signal and DRC signals are transmitted at the same time as the Stop-Repeat bit. The Stop-Repeat bit is transmitted using a different orthogonal Walsh function than the reverse link data signals and the pilot and DRC signals. In an exemplary embodiment, the reverse link data, the pilot/DRC channel, and the Stop-Repeat signal are orthogonally spread by 4-ary Walsh functions W_2^4 , W_0^4 , and W_3^4 , respectively, as defined in Table 1 above.

FIG. 3b is a diagram showing a pattern of forward link slot transmissions in accordance with an alternate embodiment. The subscriber station monitors the signal quality of the pilot burst data and uses the signal quality information to predict whether the accompanying data in the slot can be correctly decoded. For example, the subscriber station monitors the pilot burst signal quality in a first slot 322a of a multiple-slot packet to determine whether the packet can be successfully decoded. If the subscriber station determines that the packet can probably be successfully decoded, the subscriber station sends a Stop-Repeat signal in the immediately following time slot 324a. In an exemplary embodiment, the Stop-Repeat signal may be sent before the packet has been completely decoded.

In an exemplary embodiment, the subscriber station accumulates data received in the first slot 322a into a packet accumulation buffer and tries to decode a packet preamble from the signal. Based on the preamble, the subscriber station identifies time slot 322a as the first slot of a multiple-slot packet addressed to the subscriber station. In an exemplary embodiment, the subscriber station analyzes the quality of the pilot burst data received in time slot 322a. The pilot burst quality information is then used to predict whether the packet data in time slot 322a can be successfully decoded.

In an exemplary embodiment, the pilot burst signal quality information from subsequent time slots associated with the same packet is combined to form a new prediction of whether the packet can be reliably decoded. For example, a subscriber station may receive a first transmission of a multiple-slot packet in a first time slot 322a. If the subscriber station does not send a Stop-Repeat signal in time slot 324a, the serving base station will send the second transmission of the multiple-slot packet in time slot 322b. The subscriber

station will combine signal quality information generated from pilot bursts in the first slot **322a** with signal quality information generated from pilot bursts in the second slot **322b**. This process continues with the third slot of the multiple-slot packet **322c** and so forth until the serving base station has transmitted the maximum number of slots for the multiple-slot packet. After each new slot of a multiple-slot packet is received, the subscriber station uses the cumulative pilot burst signal quality information to generate a new prediction of whether the packet can be successfully decoded. If it is determined that the packet can be successfully decoded, then the subscriber station sends a Stop-Repeat signal in the nearest reverse link time slot to the serving base station. After sending the Stop-Repeat signal, the subscriber station begins looking for the beginning of a new packet in subsequent forward link time slots.

In an exemplary embodiment, a multiple-slot packet is sent during every other time slot. In order to accumulate multiple-slot packets in every forward link time slot, a subscriber station needs only two separate packet accumulation buffers. This lesser number of packet accumulation buffers is desirable, because it reduces the cost of building the subscriber station.

In an exemplary embodiment, the destination subscriber station uses the second half-slot of a first time slot **322a** to evaluate the signal quality of the pilot burst received during the first half-slot of the first time slot **322a**. In an exemplary embodiment, this is necessary to allow time to determine whether to send a Stop-Repeat signal during the next time slot **324a**. A Stop-Repeat signal sent in time slot **324a** will be based on pilot burst signal quality information from the pilot burst in the first half-slot, but not the pilot burst in the second half-slot of time slot **322a**. If no Stop-Repeat signal is sent in time slot **324a**, then signal quality information from three pilot burst periods is analyzed in the second half-slot of time slot **322b** to determine whether to send a Stop-Repeat signal during time slot **324b**. The pilot burst periods analyzed during the second half-slot of time slot **322b** include both pilot bursts received during time slot **322a** and the pilot burst from the first half-slot of time slot **322b**. Likewise, pilot burst data from five pilot bursts are analyzed during time slot **322c**, with two additional pilot bursts being analyzed in each subsequent time slot associated with the same multiple-slot packet. In an alternate embodiment in which faster processors are used, both pilot bursts of each new time slot are used to determine whether to send a Stop-Repeat signal in the following time slot.

In an exemplary embodiment, analyzing the pilot burst signal quality takes less time than actually decoding the contents of the packet. For this reason, the subscriber station may send the Stop-Repeat signal in the time slot

324a immediately after the slot 322a containing the packet data. One disadvantage with this approach is that inaccurate predictions can waste bandwidth. For example, the subscriber station might predict that a packet can be successfully decoded based on the quality of the pilot burst signal. The subscriber station would then send a Stop-Repeat signal to the serving base station based on that prediction. After receiving the Stop-Repeat signal, the base station will not send data for that packet in any more time slots. If the prediction turns out to be inaccurate and the packet cannot be successfully decoded, then all forward link time slots previously used for that packet will have been wasted.

In an exemplary embodiment, signal quality information for multiple pilot bursts is cumulatively analyzed to generate a decoding prediction metric. In an exemplary embodiment, all but the pilot burst in the last half-slot are analyzed to generate the decoding prediction metric. In an exemplary embodiment, each forward link time slot is divided into two half-slots. Each half-slot has one pilot burst, transmitted at the center of the half-slot. The pilot burst information generates the decoding prediction metric by adding the C/I values generated over each pilot burst. The decoding prediction metric is then compared with a decoder prediction threshold. If the decoding prediction metric is greater than or equal to the decoding prediction threshold, then the subscriber station sends a Stop-Repeat signal to the serving base station.

Either an unnecessarily high or an unnecessarily low decoder prediction threshold value can lead to system inefficiency. For example, if the decoder prediction threshold is too low, then the subscriber station will incorrectly predict that a packet can be successfully decoded. After sending a Stop-Repeat signal, the subscriber station will not be able to decode the packet from the data received in previous time slots. The data received in previous time slots will be lost. On the other hand, if the decoder prediction threshold is too high, then the subscriber station will incorrectly predict that a packet cannot be successfully decoded from the data received in previous time slots. Because the subscriber station will not send a Stop-Repeat signal, it will receive an additional time slot of data that it doesn't need. The bandwidth used to send the unneeded time slot will be wasted. In an exemplary embodiment, the decoder prediction threshold is chosen to balance the cost of incorrect predictions in either direction. In addition, the decoder prediction threshold may be modified over time to compensate for a changing signal propagation environment.

In an alternate embodiment, the serving base station transmits a multiple-slot packet in every other time slot, and the subscriber station performs full decoding before sending the Stop-Repeat signal. For example, if

the decoding period is two time slots long, then the signal received in the first time slot 322a will not be decoded until the end of time slot 322b. By the time the subscriber station decodes the first time slot 322a of the packet, the next time slot 322b for the packet will already have been received. After decoding of the first time slot 322a has begun, the subscriber station accumulates the data received for the same packet in the next time slot 322b into the same packet accumulation buffer. If the subscriber station correctly decodes the packet from the signal received in the first time slot 322a, then the subscriber station sends a Stop-Repeat signal during the next time slot 324b. In this event, the bandwidth used to send the copy of the packet within the second time slot 322b will have been wasted. If the packet is correctly decoded after receiving and accumulating the fourth slot 322d of data for the packet, then the subscriber station sends a Stop-Repeat signal during the slot 324e following the decoding period. In an exemplary embodiment, multiple-slot packets are sent in every other time slot, the subscriber station does full decoding after each packet time slot, and at most one time slot of data is wasted.

In an exemplary embodiment, the subscriber station does not send a Stop-Repeat signal after the maximum number of time slots have been received for a packet. This is true even if the subscriber station successfully decodes a multiple-slot packet after accumulating data in the second-to-last time slot of the packet. It is not necessary for the subscriber station to consume reverse link bandwidth telling the serving base station to stop repeating the packet when the serving base station would stop at that time anyway.

In another alternate embodiment, the subscriber station combines two of the techniques described above. The subscriber station performs pilot burst signal quality analysis and, if the decoding prediction metric is greater than or equal to the decoding prediction threshold, then the subscriber station sends a Stop-Repeat signal to the serving base station. In parallel with analyzing the quality of received pilot burst signals, the subscriber station performs full decoding of received time slot data.

In an exemplary embodiment, multiple-slot packets are sent in every other time slot, and the decoding period is two time slots. The subscriber station receives the first slot of a multiple-slot packet in time slot 322a and stores the received data into a packet accumulation buffer. The subscriber station analyzes the quality of the pilot burst signal received in the time slot 322a and generates a decoding prediction metric. If the decoding prediction metric is greater than or equal to the decoding prediction threshold, then the subscriber station sends a Stop-Repeat signal in time slot 324a. If the decoding prediction metric is less than the decoding prediction threshold, then the

subscriber station does not send a Stop-Repeat signal in time slot **324a**. The subscriber station also begins decoding the contents of the packet accumulation buffer. If the packet can be successfully decoded from the contents of the packet accumulation buffer, then the subscriber station sends a Stop-Repeat signal in the time slot **324b** immediately following the decoding period. The subscriber station analyzes pilot burst data received in time slots **322a** and **322b** to determine whether to send a Stop-Repeat signal in time slot **324b**. The pilot burst analysis continues in each slot until the maximum number of time slots for the packet have been received or until the subscriber station sends a Stop-Repeat signal. Likewise, the subscriber station accumulates the signals received during time slots **322a** and **322b** to determine whether to send a Stop-Repeat signal in time slot **324c**. Each subsequent slot of data is accumulated into the packet accumulation buffer, and the data is decoded. If the packet is successfully decoded from the contents of the packet accumulation buffer before the maximum number of time slots for the packet, then the subscriber station sends a Stop-Repeat signal. As soon as the subscriber station sends a Stop-Repeat signal, whether based on pilot burst signal quality or successful decoding, the subscriber station begins looking for new frames in the next forward link time slot.

Occasionally, a packet is not successfully decoded even after repeating the packet over the maximum number of time slots associated with the packet's transmit data rate. In some cases, the packet might be decodable after retransmitting the frame in one or two additional time slots. For example, if a sixteen-slot packet cannot be successfully decoded from the packet accumulation buffer contents after sixteen slots, perhaps accumulating the packet data in a seventeenth slot would be just enough to make the packet decodable. If this were so, then the seventeenth slot might be worth expending to avoid wasting the previous sixteen slots already devoted to the packet. In an alternate embodiment, the subscriber station may request that a packet be repeated over a limited number of time slots after the maximum time slots have already been transmitted. For example, after receiving the last of sixteen time slots of a multiple-slot packet, the subscriber may request additional repeated transmissions of the packet from the serving base station.

In an exemplary embodiment, the subscriber station sends a Continue-Repeat signal to the serving base station to request that the data for a packet be retransmitted in an additional time slot. In an exemplary embodiment, the subscriber station may request as many as $n/2$ repeated transmissions of an n -slot packet in one-slot increments. For example, after receiving the last slot of a sixteen-slot packet in time slot **322p**, the subscriber station may request as many

as eight additional repetitions of the packet beyond time slot 322p. If the subscriber station is not able to decode the packet from data received in time slot 322p, the subscriber station sends a Continue-Repeat signal in the following time slot 324p. Upon receiving the Continue-Repeat signal transmitted during time slot 324p, the serving base station retransmits the packet in a seventeenth time slot 322q. This process continues until the subscriber station is unable to decode the packet after having requested and received the packet in a total of twenty-four time slots.

In an exemplary embodiment, the base station retransmits the packet in only one time slot after receiving a Continue-Repeat signal. For example, in order to receive a seventeenth retransmission of a packet in time slot 322q, the subscriber station must send a Continue-Repeat signal in time slot 324p. In order to receive an eighteenth retransmission of a packet in time slot 322r, the subscriber station must send another Continue-Repeat signal in time slot 324q. In an exemplary embodiment, the subscriber station may request half as many Continue-Repeats of a packet as the maximum number of slots for the multiple-slot packet. For example, the subscriber station may send as many as eight Continue-Repeat signals for a sixteen-slot packet.

Even when a subscriber station has received all the slots of a multiple-slot packet without being able to correctly decode the packet, the subscriber station should not necessarily send a Continue-Repeat signal. Based on the signal quality throughout the transmission period, the subscriber station can estimate the probability that the packet can be successfully decoded even after receiving several Continue-Repeat retransmissions. For example, the subscriber station can generate this estimate using signal quality information generated from pilot burst signals received from the serving base station. In an alternate embodiment, the subscriber station decides whether to send a Continue-Repeat signal after the last time slot of a multiple-slot packet based on this estimate. If the subscriber station predicts that the packet will most likely not be decodable even after receiving the maximum number of allowable Continue-Repeat retransmissions, then the subscriber station will not send a Continue-Repeat signal.

In an alternate embodiment, the first Continue-Repeat signal causes the serving base station to send a number multiple retransmissions of the packet. The number of multiple retransmissions of the packet depends upon the maximum number of slots associated with the multiple-slot packet. For example, the first Continue-Repeat signal received in slot 324p by a serving base station after sending the sixteenth time slot 322p of a sixteen-slot packet causes the serving base station to retransmit the packet for an additional eight

time slots. The subscriber station can cause the serving base station to send fewer than eight retransmissions of the packet by sending a Stop-Repeat signal. One of skill in the art will appreciate that the number of additional time slots could be any fraction of the maximum number.

5 In an exemplary embodiment, the Stop-Repeat signal and the Continue-Repeat signal are sent using a spare DRC code word on the DRC channel. For example, if the first eleven code words of the 4-bit DRC channel signal are used to request each of the eleven data rates, then the twelfth DRC code word is used for sending Stop-Repeat and Continue-Repeat signals. The base station
10 distinguishes Stop-Repeat signals from Continue-Repeat signals based upon time of receipt. For example, if the base station receives the twelfth DRC code word from the destination subscriber station before the last time slot of a multiple-slot packet has been transmitted, the base station recognizes it as a Stop-Repeat signal. If the base station receives the twelfth DRC code word
15 from the destination subscriber station immediately after the last time slot of a multiple-slot packet has been transmitted, the base station recognizes it as a Continue-Repeat signal. As discussed above, the subscriber station may send the Stop-Repeat signals and Continue-Repeat signals at greater power than pilot signals or DRC rate requests. This is done to improve the reliability of receiving the Stop-Repeat signals and Continue-Repeat signals at the base
20 station.

In an alternate embodiment, Stop-Repeat and Continue-Repeat signals are sent using different spare DRC code words on the DRC channel. For example, the first eleven code words of the 4-bit DRC channel signal are used to
25 request eleven data rates. One of the remaining five DRC code words is used for sending Stop-Repeat signals and a different one of the remaining four DRC code words is used to send Continue-Repeat signals.

The Stop-Repeat and Continue-Repeat signals consume reverse link bandwidth, and therefore impact reverse link capacity. For this reason, the
30 transmission of Stop-Repeat and Continue-Repeat signals is advantageously minimized in the system. Because each base station transmits to no more than one destination subscriber station at a time, no more than one subscriber station per cell can send either a Stop-Repeat or a Continue-Repeat signal. Also, a subscriber station does not send a Stop-Repeat and Continue-Repeat signal to a
35 base station unless it will change the behavior of the base station. For example, a subscriber station does not send a Stop-Repeat signal after the last time slot of a multiple-slot packet, because the base station will stop transmitting the packet even without receiving the Stop-Repeat signal. Similarly, the subscriber station will not send a Continue-Repeat signal if the base station would otherwise

continue transmitting copies of a packet without receiving the Continue-Repeat signal.

In an alternate embodiment, the Continue-Repeat signal is sent using the negative value of the 4-ary Walsh function used to send the Stop-Repeat symbol. In an exemplary embodiment, the reverse link data is spread using 4-ary Walsh function W_2^4 , as defined in Table 1 above. The pilot/DRC channel is spread using 4-ary Walsh function W_0^4 , as defined in Table 1 above. In an exemplary embodiment, a +1 spread using 4-ary Walsh function W_3^4 , as defined in Table 1 above indicates, a Stop-Repeat signal. A value of (-1) spread using 4-ary Walsh function W_3^4 (as defined in Table 1 above) indicates a Continue-Repeat signal. If neither a Stop-Repeat signal nor a Continue-Repeat signal is being sent, then no power is transmitted on the orthogonal channel distinguished by 4-ary Walsh function W_3^4 , as defined in Table 1 above.

In an exemplary embodiment, the time slots of a multiple-slot packet are spaced at constant intervals. For example, in FIG. 3a, the different slots of a multiple-slot packet are shown as every fifth time slot. In FIG. 3b, the different slots of a multiple-slot packet are shown as every other time slot. At very low data rates, the likelihood that a packet will be successfully decoded in the first few time slots is generally very small. However, spacing out the time slots used to transmit a multiple-slot packet also stretches out the time that it takes to completely transfer the packet. It is desirable to minimize the total time necessary to transmit a multiple-slot packet. In an alternate embodiment, the serving base station sends the first slots of a multiple-slot packet consecutively. For example, the serving base station might send the first eight time slots of a sixteen-time-slot packet consecutively and then transmit the remaining time slots at five-slot intervals. In an exemplary embodiment, the serving base station sends the first $n/2$ time slots of an n -time-slot packet consecutively, and sends the remaining time slots at constant intervals. In alternate embodiments, other patterns of time slot usage for multiple-slot packets are also contemplated.

FIG. 4 is an exemplary flowchart of a method for a subscriber station using Stop-Repeat to decode a forward link packet. At step 402, the subscriber station measures the C/I ratio of the forward link signal from each base station in the subscriber station's active set. Based on the measured C/I information, an exemplary subscriber station sends a DRC signal to a serving base station on a reverse link DRC channel. As described above, an exemplary subscriber station sends a DRC signal at step 404 that specifies one of a predetermined set of rates to be used in transmitting forward link data to the subscriber station. In

an exemplary embodiment, the DRC signal sent at step 404 is based on measurements of C/I ratio performed during multiple forward link time slots.

During a forward link time slot following the sending of the DRC signal at step 404, the subscriber station reads the received forward link signal into a buffer at step 406. In an exemplary embodiment, the buffer is a packet accumulation buffer as described above. The subscriber station then attempts to decode a preamble from the contents of the buffer at step 408. In an exemplary embodiment, the serving base station inserts a preamble into the first slot of a packet transmission that only the intended destination subscriber station can decode.

If no preamble is decoded at step 408, then at step 410 the subscriber station requests a new packet again, starting with step 402. In an exemplary embodiment, the data rate of the packet must equal the data rate requested in the DRC signal sent at step 404. In an alternate embodiment, the data rate is encoded into the preamble of the packet, and is extracted at step 408. If at step 408 a preamble is decoded that indicates that the forward link time slot contains packet data addressed to the subscriber station, then the subscriber station analyzes the contents of the buffer at step 412.

In an exemplary embodiment, at step 412 the subscriber station attempts to completely decode the received packet from the contents of the buffer. In an alternate embodiment as described above, the subscriber station at step 412 analyzes the received signal quality of the pilot burst signals received during time slots associated with packet data in the buffer.

After analyzing the contents of the buffer at step 412, at step 414 the subscriber station determines whether the serving base station will send any more data for the packet. In an exemplary embodiment, the maximum number of time slots used to transmit a forward link packet depends on the data rate used to send the packet. In an exemplary embodiment, the serving base station sends a multiple-slot packet using no more than a maximum number of forward link time slots based on the data rate. At step 414, the subscriber station determines whether this maximum number of time slots has been used for the packet. If the maximum number of forward link time slots has already been used for the packet, then the subscriber station proceeds to step 440 to determine whether to send a Continue-Repeat message.

The processing performed at step 440 is advantageously similar or identical to the processing performed at step 416. If at step 440 the subscriber station determines that the packet has been successfully decoded, or will probably be successfully decoded based on pilot burst quality, then the subscriber station returns to step 402 to request the next packet. Otherwise, the

subscriber station proceeds to step 442. At step 442, the subscriber station determines, based on the number of Continue-Repeat signals previously sent for the packet, whether to send a new Continue-Repeat signal requesting retransmission of the packet.

- 5 If at step 442 the subscriber station has not already sent the maximum allowable number of Continue-Repeat signals to the serving base station for the packet, then the subscriber station proceeds to step 444 and sends a Continue-Repeat signal. The maximum allowable number of Continue-Repeat signals may vary with data rate and number of slots in the multiple-slot packet. In an
10 exemplary embodiment, a maximum of $n/2$ additional slots may be requested for an n -slot-packet. The Continue-Repeat signal may be sent using any of the techniques described above.

- After sending the Continue-Repeat message at step 444, the subscriber station accumulates the next slot of data for the packet into the packet
15 accumulation buffer at step 446. Then, the subscriber station attempts again to decode the contents of the packet accumulation buffer at step 448.

- In an alternate embodiment, the subscriber station sends a maximum of one Continue-Repeat message per packet, after which it decodes a predetermined number of slots retransmitted by the serving base station. After
20 sending one Continue-Repeat signal for a packet at step 444, the subscriber station sends no more Continue-Repeat signals for that packet. For example, after sending a Continue-Repeat signal at step 444, the subscriber station accumulates the next slot of data for the packet into the buffer at step 446 and decodes the buffer contents at step 448. If the packet is successfully decoded at
25 step 440, then the subscriber station proceeds to step 402. If at step 440 the packet has been successfully decoded but the base station has not yet transmitted all of the retransmissions associated with the Continue-Repeat signal, then the subscriber station proceeds from step 440 to step 418 and sends a Stop-Repeat signal.

- 30 If the packet has not been successfully decoded at step 440, then the subscriber station determines at step 442 whether it has received all the retransmissions of the packet associated with the Continue-Repeat signal. If at step 442 the base station is expected to send more retransmissions of the packet in response to a previously transmitted Continue-Repeat signal, then the
35 subscriber station proceeds from step 442 to step 446. Note that in the alternate embodiment, after the first Continue-Repeat message has been sent, the subscriber station skips step 442. The subscriber station continues to decode the retransmissions sent in response to the Continue-Repeat message until either

the maximum number of retransmissions has been received or the packet is successfully decoded.

If at step 414 the maximum number of time slots has not yet been used for the packet, then the subscriber station evaluates whether the packet has been decoded at step 416. In an exemplary embodiment where full decoding of the buffer contents is performed at step 412, the subscriber station at step 416 evaluates whether the packet was successfully decoded. If the packet was not successfully decoded, then the subscriber station waits until the next forward link time slot associated with the packet and accumulates the received data into the buffer at step 420.

In an alternate embodiment where the signal quality of the received pilot burst data is analyzed at step 412, the subscriber station predicts at step 416 whether the packet can most likely be successfully decoded. This prediction is based on the signal quality of the received pilot burst information. If the subscriber station predicts that the packet cannot be successfully decoded, then the subscriber station waits until the next forward link time slot associated with the packet and accumulates the received data into the buffer at step 420.

At step 412, the subscriber station can perform full decoding, or may perform predictions of decoding success, or may do both in parallel. If, at step 416, the subscriber station determines that the packet either has been successfully decoded or can be successfully decoded, then the subscriber station sends a Stop-Repeat signal to the serving base station at step 418. The Stop-Repeat signal is sent using any of the techniques described above. After sending a Stop-Repeat signal at step 418, the subscriber station returns to step 402 to request the next packet.

FIG. 4 shows the process for receiving a single packet. As discussed above, a subscriber station may receive more than one multiple-slot packet at a time. For example, two multiple-slot packets may be received in alternating time slots. In an exemplary embodiment, a subscriber station uses the process shown in **FIG. 4** for each of potentially several multiple-slot packets using a different packet accumulation buffer for each. For example, steps 412 and 420 are performed on a first buffer associated with a first multiple-slot packet, and steps 412 and 420 are performed on a second buffer associated with a second multiple-slot packet.

FIG. 5 is an exemplary flowchart of a method used by a serving base station to transmit a forward link packet to a subscriber station. In an exemplary embodiment, the base station receives DRC signals from a plurality of subscriber stations at step 502. At step 504 the base station selects a destination subscriber station for transmission of a packet in the next forward

link time slot. The serving base station then sends the first slot of data for the packet to the destination subscriber station at step 506.

In an exemplary embodiment, a preamble is transmitted within the first time slot associated with a new packet. The preamble enables identification of the intended destination subscriber station during decoding. The data rate at which the packet is sent is based on the DRC signal received from the destination subscriber station at step 502. If the data rate is small, then the packet (called a multiple-slot packet) of data is transmitted in multiple forward link time slots. In an exemplary embodiment, only the first time slot of the multiple-slot packet is transmitted with the preamble. The preamble could alternatively be transmitted in every forward link time slot.

After sending the first time slot of data for a packet at step 506, the base station decodes the signal received from the destination subscriber station at step 508. At step 510, the base station determines whether a Stop-Repeat signal was received from the destination subscriber station. If at step 510 a Stop-Repeat signal was received, then the base station proceeds to step 502 to select a new destination subscriber station for the next new packet. If at step 510 a Stop-Repeat signal was not received (perhaps sent but not successfully decoded), the base station proceeds to step 512. At step 512, the base station compares the number of time slots already used to send the packet with the number of time slots associated with the data rate of the packet. In an exemplary embodiment, each data rate has a number of time slots known as SLOTS_PER_PACKET that the base station will use for a packet without receiving mid-packet feedback from the destination subscriber station. In an exemplary embodiment, high data rates have a SLOTS_PER_PACKET value of one. In an exemplary embodiment, packets sent at the lowest data rate are sent in as many as sixteen forward link time slots, and therefore have a SLOTS_PER_PACKET value of sixteen. The base station and the subscriber stations use the same set of SLOTS_PER_PACKET values for each of the forward link data rates.

If at step 512 the base station has sent the packet in fewer than SLOTS_PER_PACKET slots, then the base station at step 514 sends the packet data in an additional forward link time slot. After sending the packet data in another time slot at step 514, the base station proceeds again to step 508 to decode the reverse link signal received from the destination subscriber station.

If at step 512 the base station has already sent the packet in SLOTS_PER_PACKET slots, then the base station proceeds to step 516. At step 516 the base station determines whether the destination subscriber station has requested that the packet be retransmitted in forward link time slots beyond the

maximum number of time slots associated with the data rate of the packet. The base station at step 516 determines whether a Continue-Repeat signal was decoded from the destination subscriber station. If at step 516 a Continue-Repeat message was received from the destination subscriber station and successfully decoded at the base station, then the base station determines at step 518 whether the maximum number of repeats has already been sent for the packet. In an exemplary embodiment, each data rate has an associated maximum number of Continue-Repeat requests that can be made beyond the SLOTS_PER_PACKET. In an exemplary embodiment, this number for each data rate is called MAX_CONTINUE_REPEATS.

In an exemplary embodiment, MAX_CONTINUE_REPEATS is equal to SLOTS_PER_PACKET divided by two and rounded down if necessary. At step 518, the base station compares the number of Continue-Repeat signals that has been received for the packet with the MAX_CONTINUE_REPEATS value for the packet. If the number of Continue-Repeat signals that has been received for the packet is greater than or equal to MAX_CONTINUE_REPEATS, then the base station proceeds from step 518 to step 502. Otherwise, the base station sends the data in an additional slot at step 520. The base station then decodes the reverse link signal received from the destination subscriber station in the following slot at step 522. After decoding the signals received from the destination subscriber station at step 522, the base station proceeds to step 516 described above.

FIG. 5 shows the process for sending a single packet. As discussed above, a subscriber station may receive more than one multiple-slot packet at a time. For example, two multiple-slot packets may be received in alternating time slots. A single base station may send more than one multiple-slot packet in alternating forward link time slots, either to a single destination subscriber station or to multiple subscriber stations. In an exemplary embodiment, a base station uses the process shown in FIG. 5 to send each of potentially several multiple-slot packets, with each packet potentially sent at a different data rate.

In an exemplary embodiment, at step 520 the base station repeats the packet being sent to a destination subscriber station for a single forward link time slot. In an alternate embodiment, after the receipt of the first Continue-Repeat message, the base station will send MAX_CONTINUE_REPEATS repetitions of the packet data unless the base station receives a Stop-Repeat signal from the destination subscriber station.

In an exemplary embodiment, the base station transmits a multiple-slot packet in checks during time slots that are a fixed number of time slots apart. For example, the base station sends the preamble at step 506 and then sends the

next slot of data at step 514 five time slots later. In addition, the different time slots used to send the multiple-slot packet at step 514 are spaced at even five-slot intervals. At step 510 after sending each time slot of the packet at steps 506 or 514, the base station checks whether it received a Stop-Repeat signal from the destination subscriber station. In an alternate embodiment, the base station sends the first several time slots of a multiple-slot packet in consecutive forward link time slots. For example, the base station sends the first eight slots of a sixteen-slot packet in consecutive time slots. After that, the base station sends subsequent time slots for the packet at five time slot intervals. If the base station decodes a Stop-Repeat message from the destination subscriber station at step 510, the base station stops transmitting the packet no matter how many time slots have been transmitted.

FIG. 6 is a block diagram of an exemplary subscriber station apparatus.

Forward link signals are received, downconverted, and sampled at front end 602, and the resultant sample stream is provided to demodulator 604. Demodulator 604 demodulates the received signals and provides the demodulated samples to packet accumulation buffers (referred to as just buffers) 606. Although the exemplary system is shown with three buffers 606, a subscriber station may have a greater or lesser number of packet accumulation buffers. Though the demodulated signal is provided to each buffer 606, only one buffer, for example buffer 606a, accumulates the samples in any particular time slot. Control processor 616 provides control signals to each buffer 606 that control when the buffer 606 accumulates the data arriving from demodulator 604. Control processor 616 controls the buffers 606 such that buffer 606a performs accumulation of samples that correspond to entire forward link time slots. For example, in an exemplary embodiment, the subscriber station receives two multiple-slot packets at a time within alternating time slots. Control processor 616 directs buffer 606a to accumulate samples for the even time slots, and directs buffer 606b to accumulate samples for the odd time slots.

After the samples have been accumulated over a forward link time slot, control processor 616 directs the buffer that accumulated the data for the time slot, for example buffer 606a, to provide accumulated samples to decoder 610. Decoder 610 then attempts to decode data from the accumulated samples received from buffer 606a. Before the first slot of data for a new packet is received into a buffer 606, that buffer is cleared. Clearing the buffer before receiving new packet data prevents residual accumulated samples from the previous packet from interfering with decoding the samples for the new packet. Decoder 610 provides successfully decoded packets to reordering and resequencing buffer 612.

In an exemplary embodiment, the first time slot associated with a new packet is transmitted with a preamble. The preamble is punctured into the data of the first slot of data and is decoded from the demodulated samples in preamble detector 632. Puncturing is a technique well known in the art for transmitting an additional signal within a forward error correction encoded symbol stream. Preamble detector 632 receives the demodulated samples from decoder 610 and decodes preambles from the received demodulated samples and provides the decoded preamble information to control processor 616. Though shown as a separate element from control processor 616, preamble detector 632 may be incorporated into control processor 616, with preamble detection and decoding and control processing being accomplished within a single processor.

Data information is provided from demodulator 604 to carrier-to-interference ratio (C/I) processor 614. In an exemplary embodiment, C/I processor 614 analyzes the received signal quality of pilot burst signals received from one or more base stations. In an exemplary embodiment, C/I processor 614 uses this pilot burst information to predict the highest data rate at which a packet sent from a serving base station may be successfully decoded by the subscriber station. Based on this prediction, C/I processor 614 sends an information signal to control processor 616. Though shown as a separate element from control processor 616, C/I processor 614 may be incorporated into control processor 616, with C/I calculations and control processing being accomplished within a single processor. Control processor 616 sends rate information to DRC encoder 620 to be encoded into a DRC code word. Signals generated by DRC encoder 620 are spread using Walsh spreader 622b. In an exemplary embodiment, signals generated by DRC encoder 620 are spread using 4-ary Walsh function W_0^4 in Walsh spreader 622b. The output signals of Walsh spreader 622b are then gain-controlled in gain block 624b. The gains applied in gain block 624b are controlled by control processor 616.

In an exemplary embodiment, control processor 616 also determines when a Stop-Repeat signal or a Continue-Repeat signal should be sent. Control processor 616 sends a first signal to Feedback Signal Generator 618 that causes Feedback Signal Generator 618 to generate a Stop-Repeat signal. Control processor 616 sends a second signal to Feedback Signal Generator 618 that causes Feedback Signal Generator 618 to generate a Continue-Repeat signal. Signals generated by Feedback Signal Generator 618 are spread using 4-ary Walsh function W_0^4 in Walsh spreader 622a. The output signals of Walsh spreader 622a are then gain-controlled in gain block 624a. The gains applied in gain block 624a are controlled by control processor 616.

In an exemplary embodiment, the gain-controlled signals from gain blocks 624 are summed in summing block 626 before being provided to multiplexor (MUX) 628. MUX 628 multiplexes the output signals of summer 626 with a pilot channel signal. In an exemplary embodiment, the output signals of gain blocks 624 are part of a media access control (MAC) channel that is punctured into the continuous pilot channel signal by MUX 628. The output signal of MUX 628 is provided as an in-phase component of a signal to complex pseudonoise (PN) spreader 630. In an exemplary embodiment, the quadrature-phase component of the signal carries reverse link packet data being transmitted by the subscriber station. The output of complex PN spreader 630 is then upconverted, amplified, and transmitted by the subscriber station.

In an exemplary embodiment, control processor 616 sends forward link rate information to decoder 610 and controls buffers 606 based on the DRC signals previously sent through DRC encoder 620. In an exemplary embodiment, a serving base station may only send packets to the subscriber station at the rates requested in the subscriber station's DRC signals. Allowing the subscriber station to dictate the forward link data rate makes blind rate detection at the subscriber station unnecessary. In an alternate embodiment, the base station may send packets using a data rate other than those specified in the subscriber station's DRC signals. In the alternate embodiment, decoder 610 performs blind rate detection.

In an exemplary embodiment, demodulator 604 performs such functions as PN despreading, Walsh despreading, and deinterleaving of the data signals received from front end 602. The deinterleaving performed by demodulator 604 may utilize any of a number of interleaving techniques, such as block interleaving and bit reversal interleaving. In an exemplary embodiment, decoder 610 performs forward error correction (FEC) decoding of the data signals received from buffers 606. Decoder 610 may utilize any of several forward error correction coding techniques, including turbo-coding, convolutional coding, block coding, or other forms of coding including soft decision coding. In an exemplary embodiment, control processor 616 may be a general-purpose microprocessor, digital signal processor (DSP), programmable logic device, application specific integrated circuit (ASIC), or any other device capable of performing the functions of control processor 616 described herein. In an exemplary embodiment, C/I processor 614 may be a general-purpose microprocessor, digital signal processor (DSP), programmable logic device, application specific integrated circuit (ASIC), or any other device capable of performing the functions of C/I processor 614 described herein.

FIG. 7 is a block diagram of an exemplary base station apparatus. In an exemplary embodiment, data packets are received from a base station controller (not shown) through base station controller (BSC) interface **702**. Each packet received from the base station controller includes an address that identifies the intended destination subscriber station. The packets are saved in data queue **704** until they are either transmitted or dropped. Scheduler **708** selects the destination subscriber station associated with each forward link time slot, retrieves the corresponding forward link packet from data queue **704**, and provides the data to modulator (MOD) **706**. Modulator **706** modulates the packet data received from scheduler **708** and provides the modulated signals to radio frequency (RF) unit **710**. RF unit **710** upconverts and amplifies the modulated signals and transmits the upconverted signals through antenna **712**. Though one antenna **712** is shown, RF unit **710** could transmit and receive signals through multiple antennas.

In an exemplary embodiment, the base station receives reverse link signals through antenna **712**, where they are downconverted in RF unit **710**. RF unit **710** provides the downconverted, sampled signals to demodulator **716**. Demodulated packets are provided by demodulator **716** to control processor **714**, which routes data packets to base station controller (BSC) interface **702**. In an exemplary embodiment, BSC interface **702** then sends the reverse link packets to a base station controller (not shown) through a backhaul interface (not shown).

Demodulator **716** also decodes Stop-Repeat and Continue-Repeat signals and provides those signals to control processor **714**. Control processor **714** sends Stop-Repeat and Continue-Repeat information to scheduler **708**. Upon receiving a Stop-Repeat signal or when no more repeats of a packet are to be sent, scheduler **708** clears the data of that packet from data queue **704**. That space in the data queue can then be used for subsequent packets. Upon receiving a Continue-Repeat signal, scheduler **708** retransmits the data of the associated packet from data queue **704** in a subsequent forward link time slot.

In an exemplary embodiment, modulator **706** performs such functions as forward error correction (FEC) encoding, interleaving, Walsh spreading, and PN spreading of the data received from scheduler **708**. In an exemplary embodiment, demodulator **716** performs such functions as PN despreading, Walsh despreading, deinterleaving, and forward error correction (FEC) decoding of the data signals received from RF unit **710**. The interleaving and deinterleaving performed by modulator **706** and demodulator **716** may utilize any of a number of interleaving techniques, such as block interleaving and bit reversal interleaving. Modulator **706** and demodulator **716** may utilize any of

several forward error correction techniques, including turbo-coding, convolutional coding, block coding, or other forms of coding including soft decision coding. In an exemplary embodiment, scheduler 706 may be a general-purpose microprocessor, digital signal processor (DSP), programmable logic device, application specific integrated circuit (ASIC), or any other device capable of performing the algorithms described herein.

The previous description of the preferred embodiments is provided to enable any person skilled in the art to make or use the present invention. The various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

WHAT IS CLAIMED IS:

1. A method for receiving a first packet from a source network node
- 2 comprising the steps of:
 - 4 generating a data rate control signal based on the signal quality of a received signal transmitted by a source network node;
 - 5 sending said data rate control signal to the source network node;
 - 6 receiving a first signal having a data rate based on said data rate control signal from the source network node;
 - 8 measuring the signal quality of said first signal to form a first signal quality metric; and
 - 10 sending a first feedback signal based on said first signal quality metric.
2. The method of claim 1 wherein said step of receiving the first signal
- 2 further comprises decoding a preamble from the first signal indicating that the first signal contains a packet of data addressed to the destination network node.
3. The method of claim 1 wherein said step of receiving the first signal
- 2 further comprises extracting the first signal from a first time slot of a predetermined number of time slots, wherein the predetermined number of
- 4 time slots is based the data rate.
4. The method of claim 3 wherein said step of receiving the first signal
- 2 further comprises determining the predetermined number of time slots based on previous data rate control signals transmitted.
5. The method of claim 1 wherein the first signal is received within a first
- 2 time slot having a predetermined slot duration, the method further comprising the step of accumulating said first signal into a first set of accumulated packet
- 4 samples associated with the packet.
6. The method of claim 5 wherein said step of measuring the signal quality
- 2 of said first signal further comprises attempting to decode the packet from said first set of accumulated packet samples, and wherein said first signal quality
- 4 metric is based on the results of said step of attempting to decode.
7. The method of claim 6 wherein said first signal quality metric indicates
- 2 that the packet was successfully decoded in said step of attempting to decode, and wherein said first feedback signal is a Stop-Repeat signal.

8. The method of claim 6 wherein said first signal quality metric indicates
2 that the packet was not successfully decoded in said step of attempting to
decode, and wherein said first feedback signal is a Continue-Repeat signal.

9. The method of claim 5 wherein the first signal is received within a first
2 time slot having a predetermined slot duration, the method further comprising
the steps of:

4 accumulating said first signal into a first set of accumulated packet
samples associated with the packet;

6 receiving a second signal within a second time slot having said
predetermined slot duration;

8 accumulating said second signal into said first set of accumulated packet
samples associated with the packet;

10 measuring the signal quality of said first signal and said second signal to
form a second signal quality metric; and

12 sending a second feedback signal based on said second signal quality
metric.

10. The method of claim 9 wherein the elapsed time between the end of said
2 first time slot and the beginning of said second time slot has a predetermined
duration equal to a multiple of said predetermined slot duration.

11. The method of claim 10 wherein the multiple is two.

12. The method of claim 10 wherein the multiple is three.

13. The method of claim 10 wherein the multiple is four.

14. The method of claim 1 wherein said step of generating a quality metric
2 comprises measuring the carrier-to-interference (C/I) ratio of the received
signal.

15. The method of claim 14 wherein said data rate control signal specifies
2 one requested data rate of a predetermined set of data rates, and wherein said
data rate is equal to said one requested data rate.

16. The method of claim 1 wherein said step of measuring the signal quality of said first signal comprises attempting to decode the packet from said first set of accumulated samples.

17. The method of claim 1 wherein said step of measuring the signal quality of said first signal comprises measuring the carrier-to-interference ratio of one or more received pilot burst signals.

18. The method of claim 1 wherein said feedback signal is a Stop-Repeat signal, the method further comprising the step of decoding the packet from said first set of accumulated packet samples.

19. The method of claim 1 wherein said feedback signal is a Continue-Repeat signal, the method further comprising the steps of:
 accumulating a second signal into said first set of accumulated packet samples associated with the packet;
 measuring the signal quality of said second signal to generate a second signal quality metric;
 generating a decoding prediction metric based on said first signal quality metric and said second signal quality metric;
 comparing said decoding prediction metric with a decoder prediction threshold; and
 sending a feedback signal based on said step of comparing.

20. The method of claim 1 wherein said step of sending a feedback signal further comprises the sub-steps of:

covering the symbols of a Stop-Repeat signal with a first Walsh code to generate a Walsh-covered Stop-Repeat signal; and
 transmitting said Walsh-covered Stop-Repeat signal concurrently with one or more additional signals covered with a second Walsh code, wherein said second Walsh code is orthogonal to said first Walsh code.

21. The method of claim 1 wherein said step of sending a feedback signal further comprises the sub-steps of:

covering the symbols of a Continue-Repeat signal with a first Walsh code to generate a Walsh-covered Stop-Repeat signal; and

transmitting said Walsh-covered Stop-Repeat signal concurrently with
 6 one or more additional signals covered with a second Walsh code, wherein said
 second Walsh code is orthogonal to said first Walsh code.

22. A method for sending a first data packet from a source network node to
 2 a destination network node, the method comprising the steps of:
 receiving a data rate control signal from the destination network node;
 4 determining a number of copies of the first data packet to send to the
 destination network node based on said data rate control signal;
 6 encoding a first copy of the first data packet into a first signal;
 sending said first signal to the destination network node;
 8 receiving a Stop-Repeat signal from the destination network node; and
 sending fewer than said number of copies to the destination network
 10 node based on said Stop-Repeat signal.

23. The method of claim 22 wherein said step of sending the first signal
 2 further comprises encoding a preamble into the first signal indicating that the
 first signal contains a packet of data addressed to the destination network node.

24. The method of claim 22 further comprising the steps of:
 2 encoding a second copy of the first data packet into a second signal; and
 sending said second signal to the destination network node before said
 4 step of receiving a Stop-Repeat signal.

25. The method of claim 24 wherein the first signal is transmitted within a
 2 first time slot having a predetermined slot duration, and wherein the second
 signal is transmitted within a second time slot having said predetermined slot
 4 duration, an wherein the elapsed time between the end of said first time slot
 and the beginning of said second time slot has a predetermined duration equal
 6 to a multiple of said predetermined slot duration.

26. The method of claim 25 wherein the multiple is two.

27. The method of claim 25 wherein the multiple is three.

28. The method of claim 25 wherein the multiple is four.

29. The method of claim 24 further comprising the steps of:
 2 encoding a first copy of a second data packet into a third signal; and

4 sending said third signal to the destination network node, wherein the
 4 third signal is transmitted within a third time slot having said predetermined
 slot duration, and wherein said third time slot is disposed between said first
 6 time slot and said second time slot.

30. The method of claim 29 wherein the third time slot begins immediately
 2 after the first time slot ends, and wherein the second time slot begins
 immediately after the third time slot ends.

31. The method of claim 22 wherein said data rate control signal specifies
 2 one requested data rate of a predetermined set of data rates, wherein each data
 rate within said predetermined set of data rates is associated with a
 4 predetermined number of time slots, and wherein said number of copies is
 equal to the predetermined number of time slots associated with the requested
 6 data rate.

32. The method of claim 22 wherein said step of receiving a Stop-Repeat
 2 signal further comprises the sub-steps of:
 discovering the symbols of the Stop-Repeat signal with a first Walsh
 4 code; and
 discovering the symbols of a data signal with a second Walsh code,
 6 wherein said second Walsh code is orthogonal to said first Walsh code, and
 wherein said data signal is received from the destination network node.

33. The method of claim 22 wherein said step of sending said first signal
 2 further comprises sending one or more pilot burst signals.

34. A method for sending a data packet from a source network node to a
 2 destination network node, the method comprising the steps of:
 receiving a data rate control signal from the destination network node;
 4 determining a number of copies of the data packet to send to the
 destination network node based on said data rate control signal;
 6 sending a first signal containing a copy of the data packet to the
 destination network node;
 8 receiving a Continue-Repeat signal from the destination network node;
 and
 10 sending greater than said number of copies to the destination network
 node based on said Continue-Repeat signal.

35. The method of claim 34 wherein said step of sending the first signal
2 further comprises encoding a preamble into the first signal indicating that the
first signal contains a packet of data addressed to the destination network node.

36. The method of claim 34 further comprising the steps of:
2 encoding a second copy of the first data packet into a second signal; and
sending said second signal to the destination network node before said
4 step of receiving a Continue-Repeat signal.

37. The method of claim 36 wherein the first signal is transmitted within a
2 first time slot having a predetermined slot duration, and wherein the second
signal is transmitted within a second time slot having said predetermined slot
4 duration, and wherein the elapsed time between the end of said first time slot
and the beginning of said second time slot has a predetermined duration equal
6 to a multiple of said predetermined slot duration.

38. The method of claim 37 wherein the multiple is two.

39. The method of claim 37 wherein the multiple is three.

40. The method of claim 37 wherein the multiple is four.

41. The method of claim 36 further comprising the steps of:
2 encoding a first copy of a second data packet into a third signal; and
sending said third signal to the destination network node, wherein the
4 third signal is transmitted within a third time slot having said predetermined
slot duration, and wherein said third time slot is disposed between said first
6 time slot and said second time slot.

42. The method of claim 41 wherein the third time slot begins immediately
2 after the first time slot ends, and wherein the second time slot begins
immediately after the third time slot ends.

43. The method of claim 34 wherein said data rate control signal specifies
2 one requested data rate of a predetermined set of data rates, wherein each data
rate within said predetermined set of data rates is associated with a
4 predetermined number of time slots, and wherein said number of copies is
equal to the predetermined number of time slots associated with the requested
6 data rate.

44. The method of claim 34 wherein said step of receiving a Continue-Repeat
2 signal further comprises the sub-steps of:

4 decoding the symbols of the Continue-Repeat signal with a first Walsh
 code; and
 decoding the symbols of a data signal with a second Walsh code,
6 wherein said second Walsh code is orthogonal to said first Walsh code, and
 wherein said data signal is received from the destination network node.

45. The method of claim 34 wherein said step of sending said first signal
2 further comprises sending one or more pilot burst signals.

46. A network node apparatus for receiving a first packet from a source
2 network node comprising:

4 a demodulator for demodulating a downconverted sampled signal to
 produce a stream of demodulated samples;

6 a first accumulation buffer for accumulating a first subset of said
 demodulated samples associated with the first packet;

8 a decoder for decoding the contents of said first accumulation buffer to
 decode the data of the first packet;

10 a feedback signal generator for generating a feedback signal sent to the
 source network node based on a feedback control signal;

12 a control processor for controlling the subset of the stream of
 demodulated samples accumulated in said first accumulation buffer and for
 generating the feedback control signal based on the signal quality of the
14 downconverted sampled signal; and

16 a transmitter for transmitting the feedback signal to the source network
 node.

47. The apparatus of claim 46 further comprising a preamble detector for
2 detecting and decoding a preamble received within the stream of demodulated
 samples.

48. The apparatus of claim 46 further comprising a signal quality processor
2 for generating a received signal quality signal based on the received signal
 quality of the downconverted sampled signal and providing the received signal
4 quality signal to said control processor.

1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200

49. The apparatus of claim 48 further comprising a data rate control encoder
2 for encoding a data rate control signal sent to the source network node based
on the received signal quality signal.

50. The apparatus of claim 49 further comprising a first Walsh encoder for
2 covering the data rate control signal with a first Walsh code.

51. The apparatus of claim 50 further comprising a second Walsh encoder
2 for covering the feedback signal with a second Walsh code that is orthogonal to
said first Walsh code.

52. The apparatus of claim 46 wherein said feedback signal generator is
2 configured to generate a Stop-Repeat signal to the source network node based
on the feedback control signal.

53. The apparatus of claim 46 wherein said feedback signal generator is
2 configured to generate a Continue-Repeat signal to the source network node
based on a control signal from said control processor.

54. The apparatus of claim 46 wherein said control processor is configured
2 to generate the feedback control signal based on the signal quality of one or
more pilot burst signals received concurrently with the first subset of said
4 demodulated samples.

55. The apparatus of claim 46 wherein said control processor is configured
2 to generate the feedback control signal based on the successful decoding of the
first packet in said decoder.

56. The apparatus of claim 46 further comprising a second accumulation
2 buffer, for accumulating a second subset of said demodulated samples
associated with a second packet, wherein portions of the second subset are
4 disposed between portions of the first subset.

57. A network node apparatus for sending a first data packet to a
2 destination network node comprising:

a data queue for storing a plurality of data packets addressed to a
4 plurality of network nodes, wherein the destination network node is one of the
plurality of network nodes;

- 6 a demodulator for decoding data rate control signals and feedback signals received from the destination network node;
- 8 a scheduler for selecting a number of time slots for sending the first data packet, wherein the number of time slots is based on a data rate; and
- 10 a control processor for selecting the data rate based on the data rate control signals and for changing the number of time slots based on the feedback
- 12 signals.

58. The apparatus of claim 57 further comprising a modulator for
2 modulating the data from the first packet and puncturing a preamble into the data of the first packet.

59. The apparatus of claim 57 wherein said control processor is configured
2 to decrease the number of time slots used to transmit the first packet based on the decoding of a Stop-Repeat signal in said demodulator.

60. The apparatus of claim 57 wherein said control processor is configured
2 to increase the number of time slots used to transmit the first packet based on the decoding of a Continue-Repeat signal in said demodulator.

61. The apparatus of claim 57 wherein said demodulator further comprises a
2 first Walsh despreaders for decoupling the data rate control signals using a first Walsh code.

62. The apparatus of claim 58 wherein said demodulator further comprises a
2 second Walsh despreaders for decoupling the feedback signals using a second Walsh code, wherein said first Walsh code is orthogonal to said second Walsh
4 code.

63. A network node apparatus for receiving a first packet from a source
2 network node comprising:
means for generating a data rate control signal based on the signal
4 quality of a received signal transmitted by a source network node;
means for sending the data rate control signal to the source network
6 node;
means for receiving a first signal having a data rate based on said data
8 rate control signal from the source network node;
means for measuring the signal quality of said first signal to form a first
10 signal quality metric; and

means for sending a first feedback signal based on said first signal
 12 quality metric.

64. A network node apparatus for sending a first data packet to a
 2 destination network node comprising:

means for receiving a data rate control signal from the destination
 4 network node;

means for determining an initial number of copies of the data packet to
 6 send to the destination network node based on said data rate control signal;

means for sending a first signal containing a copy of the data packet to
 8 the destination network node;

means for receiving a feedback signal from the destination network
 10 node; and

means for sending a different number of copies of the data packet than
 12 the initial number of copies of the data packet to the destination network node
 based on the feedback signal.

ABSTRACT

In a high data rate communication system, a method and apparatus for improved throughput while transmitting data packets within multiple time slots. In order to avoid unnecessary retransmissions of a packet, a subscriber station sends a Stop-Repeat signal to a base station, causing the base station to cease further transmissions of the packet. In order to enable successful decoding of a packet, a subscriber station sends a Continue-Repeat signal to a base station, causing the base station to send retransmissions of the packet during time slots beyond a predetermined default number of time slots.

100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2




FIG. 1

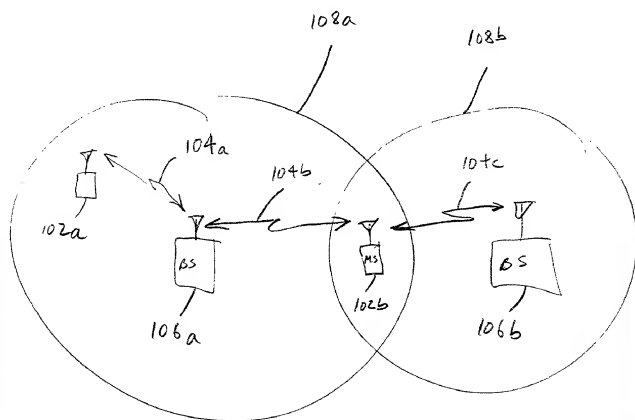


FIG. 2

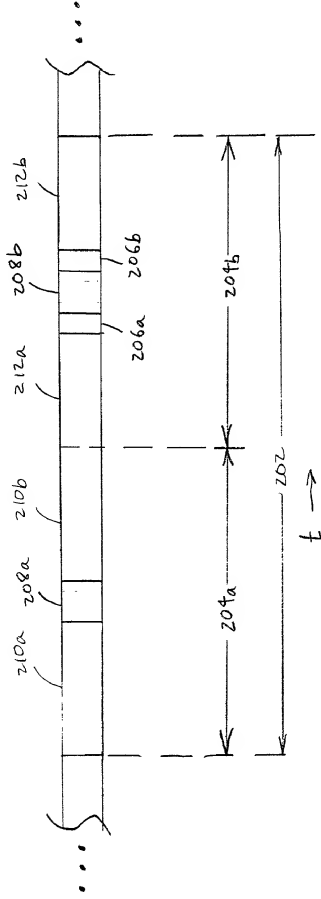


FIG. 4a

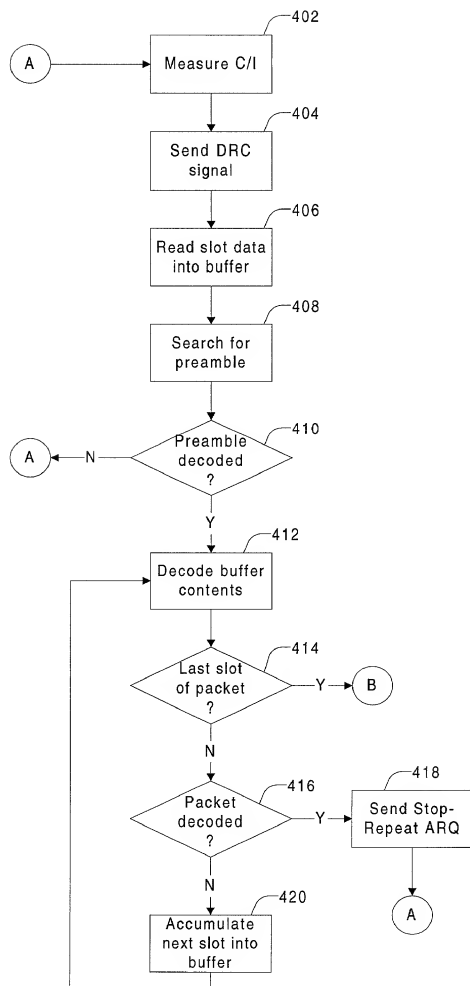


FIG. 4b

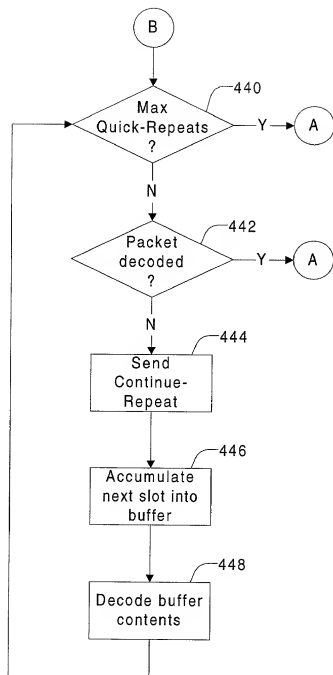


FIG. 5

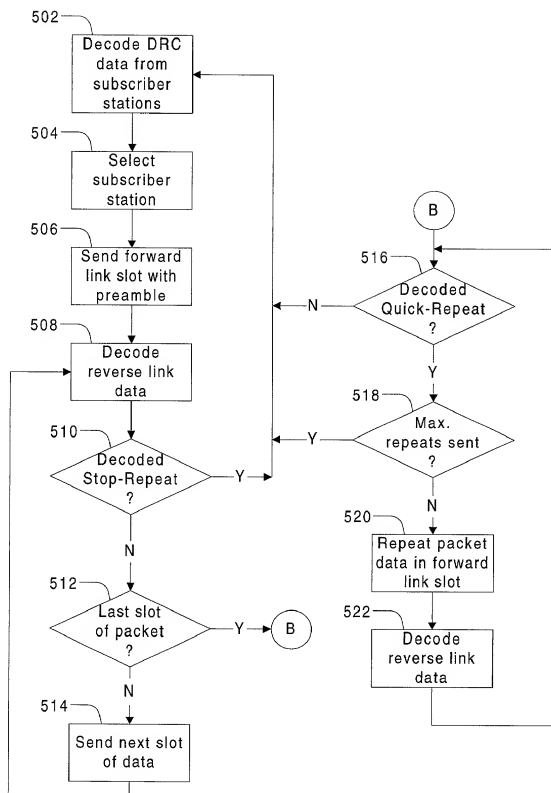


FIG. 6


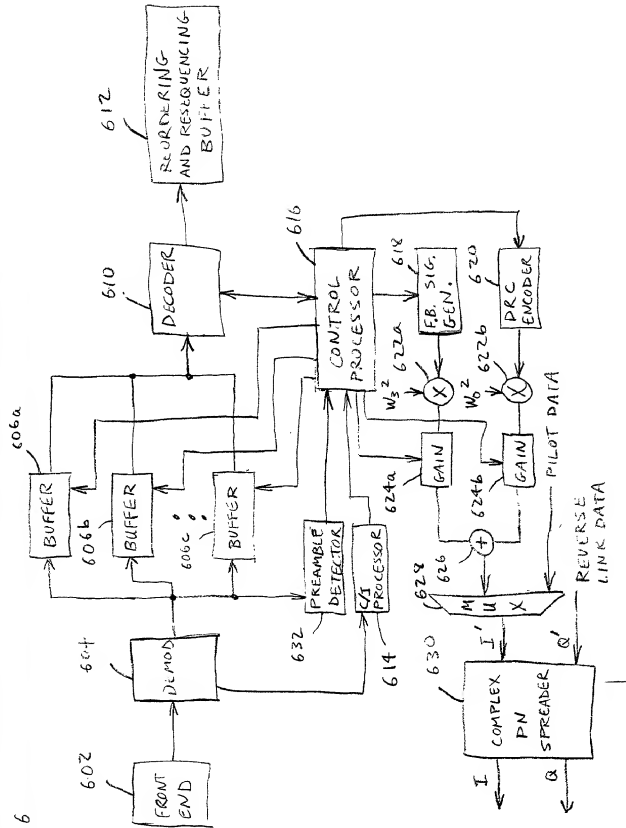


FIG. 7

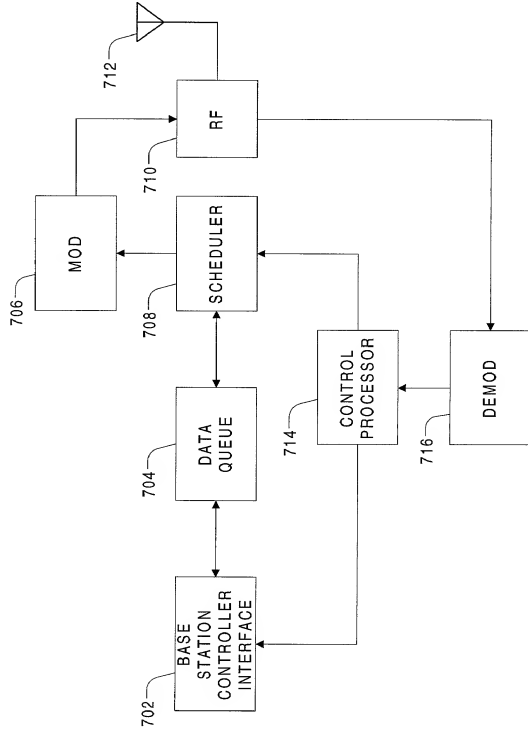

COMBINED DECLARATION/POWER OF ATTORNEY

ATTORNEY DOCKET NO.: PA000230

AS BELOW NAMED INVENTOR, I HEREBY DECLARE THAT: This Declaration is of the following type:

☒ Original ☐ Supplemental ☐ Continuation-In-Part ☐ Divisional
☐ Continuation ☐ National Stage of PCT

My residence, post office address and citizenship are as stated below next to my name: I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **METHOD AND APPARATUS FOR ADAPTIVE TRANSMISSION CONTROL IN A HIGH DATA RATE COMMUNICATIONS SYSTEM**, the specification of which:

☒ is attached hereto.
☐ was filed on _____ as Serial No. _____
☐ was described and claimed in PCT International Application No. _____ filed on _____
and as amended under PCT Article 19 on _____

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37CFR § 1.56(a).

I hereby claim foreign priority benefits under 35 USC § 119 of any foreign applications for a patent or inventor's certificate or of any PCT International applications designating at least one country other than the United States listed below and have also identified below any foreign applications for a patent or inventor's certificate or any PCT International applications designating at least one country other than the United States filed by me on the same subject matter having a filing date before that of the applications of which priority is claimed.

Priority Claimed

(Country) _____ (Application No.) _____ (Day/Month/Year/Filed) _____ (Yes) _____ (No) _____

I hereby claim the benefit under 35 USC § 120 of the United States application(s) listed below, and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 USC § 112, I acknowledge the duty to disclose material information as defined in 37 CFR 1.56(a) which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

(Serial No.) _____ (Filing Date) _____ (Status) _____

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith: Russell B. Miller, Reg. No. 31,122, Gregory D. Ogrod, Reg. No. 30,880, Sean English, Reg. 37,319, Roger W. Martin Reg. No. 39, 291, Thomas R. Rouse Reg. No. 40,793, Kevin J. Clark, Reg. No. 42,421, Thomas Streeter Reg. No. 30,007, Kent D. Baker Reg. No. 38,882, Thomas M. Thibault Reg. No. 42,181, Charles D. Brown Reg. No. 28,285, Kyong H. Macek Reg. No. 42, 977, Byron Yafuso Reg. No. 45,244, Pavel Kalousek Reg. No.44,178, Christopher O. Edwards Reg. No. 36,127, Raymond Hom Reg. No. 44,773 and Bruce W. Greenhaus Reg. No. 37,339, Philip R. Wadsworth, Reg. No. 29,219; Sayed Hossain Beladi, Reg. No. 42,311, Michael D. Hartogs, Reg. No. 36,547; Sandip Minhas, Reg. No. 44,945. Please direct all telephone calls to Philip R. Wadsworth at (858) 651-4404 and address all correspondence to: Jean Lupien, QUALCOMM Incorporated, 5775 Morehouse Drive, San Diego, California 92121-1714.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 USC § and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Rashid Attar	Inventor Signature	Date
Residence 7235 Charmant Drive, #817, San Diego, California 92122		Citizenship India
Post Office Address 7235 Charmant Drive, #817, San Diego, California 92122		
Full Name of Second or Joint Inventor if any Roberto Padovani	Inventor Signature	Date
Residence 13593 Penfield Point, San Diego, California 92130		Citizenship Italy
Post Office Address 13593 Penfield Point, San Diego, California 92130		

QUALCOMM Incorporated
5775 Morehouse Drive
San Diego, California 92121-1714
Telephone: (858) 651-4404

Full Name of Third or Joint Inventor if any Peter J. Black	Inventor Signature	Date
Residence 2961 First Avenue, San Diego, California 92126		Citizenship Australia
Post Office Address 2961 First Avenue, San Diego, California 92126		
Full Name of Fourth or Joint Inventor if any Nagabhushana Sindhusayana	Inventor Signature	Date
Residence 7794 Roan Road, San Diego, California 92129		Citizenship India
Post Office Address 7794 Roan Road, San Diego, California 92129		
Full Name of Fifth or Joint Inventor if any Eduardo Esteves	Inventor Signature	Date
Residence 14005H Mango Drive, Del Mar, California 92014		Citizenship Brazil
Post Office Address 14005H Mango Drive, Del Mar, California 92014		
Full Name of Sixth or Joint Inventor if any Mehmet Gurelli	Inventor Signature	Date
Residence 5775 Morehouse Drive, San Diego, California 92121		Citizenship
Post Office Address 5775 Morehouse Drive, San Diego, California 92121		

QUALCOMM Incorporated
5775 Morehouse Drive
San Diego, California 92121-1714
Telephone: (858) 651-4404
Facsimile: (858) 658-2502